



**HAL**  
open science

## Monophyletic group of unclassified $\gamma$ -Proteobacteria dominates in mixed culture biofilm of high-performing oxygen reducing biocathode

Michael Rothballer, Matthieu Picot, Tina Sieper, Jan B. A. Arends, Michael Schmid, Anton Hartmann, Nico Boon, Cees J. N. Buisman, Frédéric Barrière, David P. B. T. B. Strik

### ► To cite this version:

Michael Rothballer, Matthieu Picot, Tina Sieper, Jan B. A. Arends, Michael Schmid, et al.. Monophyletic group of unclassified  $\gamma$ -Proteobacteria dominates in mixed culture biofilm of high-performing oxygen reducing biocathode. *Bioelectrochemistry*, 2015, 106 (Part A), pp.167-176. 10.1016/j.bioelechem.2015.04.004 . hal-01151357

**HAL Id: hal-01151357**

**<https://univ-rennes.hal.science/hal-01151357>**

Submitted on 14 Sep 2015

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# A monophyletic group of unclassified *γ-Proteobacteria* dominates in a mixed culture biofilm of high-performing oxygen reducing biocathode

Michael Rothballer<sup>a#</sup>, Matthieu Picot<sup>b#</sup>, Tina Sieper<sup>a</sup>, Jan B. A. Arends<sup>c</sup>, Michael Schmid<sup>a</sup>, Anton Hartmann<sup>a</sup>, Nico Boon<sup>c</sup>, Cees Buisman<sup>d</sup>, Frédéric Barrière<sup>b</sup>, David P. B. T. B. Strik<sup>d\*</sup>

<sup>a</sup> Helmholtz Zentrum München - German Research Center for Environmental Health, Department of Environmental Sciences, Research Unit Microbe-Plant Interactions, Ingolstädter Landstrasse 1, 85764 Neuherberg, Germany

<sup>b</sup> Université de Rennes 1, CNRS UMR no. 6226, Institut des Sciences Chimiques de Rennes, Équipe MaCSE, Avenue Général Leclerc 35042 Rennes cedex, France

<sup>c</sup> Ghent University, Faculty of Bioscience Engineering, Laboratory of Microbial Ecology and Technology (LabMET), Coupure Links 653, BE-9000 Gent, Belgium.

<sup>d</sup> Wageningen University, Sub-department of Environmental Technology, Bormse Weilanden 9, 6700 AA Wageningen, The Netherlands

\* Corresponding author, email: david.strik@wur.nl

# These authors contributed equally to this work.

## Abstract

Several mixed microbial communities have been reported to show robust bioelectrocatalysis of oxygen reduction over time at applicable operation conditions. However, clarification of electron transfer mechanism(s) and identification of essential micro-organisms have not been realised. Therefore, the objective of this study was to shape oxygen reducing biocathodes with different microbial communities by means of surface modification using the electrochemical reduction of two different diazonium salts in order to discuss the relation of microbial composition and performance. The resulting oxygen reducing mixed culture biocathodes had complex bacterial biofilms variable in size and shape as observed by confocal and electron microscopy. Sequence analysis of ribosomal 16S rDNA revealed a putative correlation between the abundance of certain microbiota and biocathode performance. The best performing biocathode developed on the unmodified graphite electrode and reached a high current density for oxygen reducing biocathodes at neutral pH (0.9 A/m<sup>2</sup>). This correlated with the highest domination (60.7 %) of a monophyletic group of unclassified *γ-Proteobacteria*. These results corroborate earlier reports by other groups, however, higher current densities and higher presence of these unclassified bacteria were observed in this work. Therefore, members of this group are likely key-players for highly performing oxygen reducing biocathodes.

**Keywords:** microbial fuel cell, biofilm, oxygen reduction, biocathode, 454 amplicon sequencing

## 1. Introduction

Microbial fuel cells (MFCs) are emerging technologies which treat wastewater and generate electricity [1]. Besides, MFCs can be fuelled by anoxic sediments or by the rhizodeposits of living plants which e.g. can power sensors at remote locations [2-4]. A MFC usually consists of two compartments separated by a membrane [5]. Electrochemically active bacteria oxidise organic matter in anaerobic conditions and deliver electrons to the anode which flow via a load to the cathode. At the cathode a reduction reaction must take place. Here, oxygen reduction is attractive as it has a high redox potential, oxygen is widely available, and the reaction can be catalysed by a self-maintaining bacterial biofilm attached to a carbon electrode [6, 7]. The open access of micro-organisms to the electrode and the availability of nutrients from the environment are two boundary conditions which allow operation of mixed culture oxygen reducing biocathodes. Performance of oxygen reducing biocathodes is determined by a wide range of parameters which include: cathode (over)potential, type of biocatalyst (enzyme, pure culture or mixed culture) [8], mass transfer of reactants and products, availability of essential nutrients, buffer capacity, temperature, electrode configuration and materials [6, 9-13]. While biological oxygen reduction is a common physiological trait, i.e. micro-organisms employ oxygen as the terminal electron acceptor in their metabolism, the mechanism(s) of extracellular electron transfer coupled to microbial oxygen reduction and the natural occurrence of this type of physiology is still to be revealed [14, 15]. In several studies, species from oxygen reducing biocathodes have been isolated and identified [15-20]. However, in most cases the catalytic effect (i.e. a high current density and/or lowering the cathodic over potential) was poor and/or the biofilm was poorly developed. So far, high performing oxygen reducing biocathodes reached current densities up to 0.6 A/m<sup>2</sup> [6]. Effective use of electrode surface and high-potential cathodic catalysis is essential for MFCs in energy generating applications.

Recently, it was shown that some modifications of the anode electrode surface resulted in a power output at most two times higher than an unmodified anode. Fluorescence In Situ Hybridization (FISH) revealed that the nature of anode modification and/or degree of the modification affected the biofilm density and composition [21]. To what extent the improved power output was due to differentiation in the biofilm and/or to the modifier, which e.g. could affect charge transfer resistance, remains to be clarified. Notably, this study revealed that the modified electrode outperformed the unmodified electrode and that these surface modifications can be used to create selection pressure on an initial microbial inoculum while aiming to achieve optimized mixed culture bio-electrodes. The technique of surface modification using electrochemical reduction of aryl diazonium salts is versatile for covalent modification of graphitic carbon electrodes. This technique allows grafting of a wide range of groups with different chemical and physical properties at different thicknesses on the electrode for usage as anode and cathode [22].

The objective of the present study was to shape different microbial communities at oxygen reducing cathodes by means of surface modification to discuss the relation of microbial composition and performance. Modified cathode surfaces led to the development of different microbial community biofilms and biocathodes with distinct performances. Microbial analysis allowed discussion of the complexity, spatial and microbial composition of the biofilm. Interestingly, the highest current density (i.e. biocatalytic effect) was reached with the biocathode that was not modified and that displayed the highest microbial selectivity. The amplicon pyrosequencing and denaturing gradient gel electrophoresis (DGGE) analysis of the 16S rRNA gene showed that this enriched catalytic biofilm contained a microbial species that has not been cultured so far.

## 2. Materials and methods

### 2.1 *Electrochemical set-up and operation*

Five bioelectrochemical setups were used [9]. Each set-up consisted of an anode and a cathode made of non-porous graphite plates (geometric surface area: 22 cm<sup>2</sup>) separated by a cation exchange membrane (re-inforced membrane Fumasep-FKB, Germany). The catholyte and anolyte used have been described previously [9]. Both catholyte and anolyte were recirculated at a rate of 12 Lh<sup>-1</sup>. The biocathode was inoculated with fresh aerobic sludge (Wastewater treatment plant Bennekom, The Netherlands) and was started under air saturated conditions (oxygen concentration ~7.5 mg/L) using air pumps. The cathode potential was fixed at +0.150 V vs. Ag/AgCl using a potentiostat (IVIUM, The Netherlands). The pH was controlled at 7.0 ± 0.5 as previously described [8]. Water evaporated from the catholyte was replenished using demineralised water. Unless stated otherwise, all potentials are reported versus the chloride saturated Ag/AgCl reference electrode (+197 mV vs. Standard Hydrogen Electrode). The reference electrode was connected to a Luggin-Haber capillary which was positioned in the center of the flow through cathode compartment. Distance of capillary tip to the cathode electrode was 4 mm.

### 2.2 *Electrochemical surface modification*

Four graphite plates (Müller & Rössner GmbH & Co, Germany) have been modified using the electrochemical reduction of two diazonium salts; 4-nitro benzene diazonium and 4-decyl aryl diazonium. Aryl diazonium salts were generated *in situ* in acid media (0.1 M HCl, 100 mL) containing 10 mM of the starting aryl amine and followed by addition of 20 mM sodium nitrite [23]. This solution was then directly used as the electrolyte for the modification procedure of the graphite working electrode by electrochemical reduction of the aryl diazonium salts using a potentiostat (Autolab PGSTAT302N). A three electrode cell configuration was used with a KCl saturated calomel electrode (SCE) as the reference electrode and a graphite electrode as the counter electrode. The four graphite electrodes were modified by the reduction of the two different aryl diazonium salts, in each case using 20 or 0.5 cycles from 0.4 to -0.2 V vs. SCE at a scan rate of 0.1V/s. Nomenclature of the different electrodes used in this study and the way they have been modified are given in table 1. Contact angle measurements (table 1) were carried out before and after modification (Krüss, Easdrop DSA).

“Here table 1”

### 2.3 *Scanning Electron Microscopy*

On day 40 of the experiment, biocathode parts were removed using chisel and hammer. Scanning electron microscopy (SEM) samples were fixed overnight with glutaraldehyde (2.5 %) in 0.1 M phosphate buffer pH=7 at room temperature. Samples were washed using phosphate buffer and successively immersed in different aqueous solutions with increasing ethanol content (60, 70, 80, 90 %), then with absolute ethanol, and critical-point dried. Samples were finally coated with Au/Pd before SEM observation.

### 2.4 *DNA extraction, PCR-DGGE*

On day 40 of the experiment, biofilms were scraped off the cathodes and dissolved in filter sterilized PBS solution. Total DNA was extracted from 2 mL of liquid according to Boon et al. [24]. DNA was subsequently purified (Wizard genomic DNA purification kit, Promega) according to the manufacturer's instructions. The 16S rRNA gene was amplified by PCR with primers 338F-GC and 518R for denaturing gradient gel electrophoresis (DGGE) [25] with 5

min 94 °C initial denaturation, 30 cycles 1 min 95 °C denaturation; 1 min 53 °C annealing; 2 min 72 °C elongation and a final elongation step of 10 min at 72 °C. Separation of fragments was done with an 8 % polyacrylamide gel and a denaturing gradient of 40-60 % for 16h at 120V on an INGENY phorU2X2 system (Goes, The Netherlands). DNA was stained for 20 min with 16µL SYBR Green in 300 mL 1x TAE buffer. Images were obtained with a UV-illuminator and a digital camera. Obtained profiles were clustered using BioNumerics software (v5.1, Applied Maths, Belgium). Theoretical ecological parameters Range weighted richness (Rr; a measure of habitability of an environment) and Community organization (Co; an approximate of functional diversity) were attributed according to the microbial resource management (MRM) toolbox [26].

### 2.5 454 amplicon sequencing

The same DNA extracts isolated for DGGE were used for 454 sequencing analysis. If not otherwise mentioned, all the steps were performed according to the current Roche 454 sequencing protocol for amplicons. To generate the amplicon library for bacteria, specific primers were selected: 926-F (5'-AACTYAAAKGAATTGACGG-3', *Escherichia coli* position 907-926) [27], and 630-R (5'-CAKAAAGGAGGTGATCC-3', *E. coli* position 1528-1544) [28]. These primers were extended as amplicon fusion primers with respective A and B adapters, key sequence and multiplex identifiers (MID) as recommended and tested for their optimal annealing temperature (50°C), cycle number (30) and amount of template DNA (20 ng) to produce approximately  $10^{12}$  molecules as mentioned earlier [29]. The PCR products were purified with AMPure Beads (Agencourt, Beckman Coulter, Krefeld, Germany) and pooled in equimolar amounts.

Emulsion PCR (emPCR), emulsion breaking of DNA-enriched beads and sequencing run of the amplicon pools were performed on a second-generation pyrosequencer (454 GS FLX Titanium, Roche) using Titanium reagents and Titanium procedures as recommended by the developer following protocols for bidirectional amplicon sequencing. Quality filtering of the pyrosequencing reads was performed using the automatic amplicon pipeline of the GS Run Processor (Roche) to remove failed and low quality reads from raw data and to remove adaptor sequences.

Newbler assembler v 2.3 (Roche) was used to batch sequences based on MID-identifiers and to combine corresponding sequences derived from forward and reverse reads with a similarity of 98 % and an overlap of 200 bases for the bacterial sequences.

The alignment and phylogenetic analyses were performed using the ARB 5.1 software package [30]. After phylogenetic allocation of the sequences down to the family or genus level, the number of reads belonging to the same phylogenetic groups were summed up and listed as a percentage of the total sequencing reads obtained from each sample. Simpson (1-D) and Shannon (H) indices, as well as rarefaction curves were calculated using PAST [31] based on genus affiliations.

The assembled unique sequences with their phylogenetic allocation were deposited in GenBank. During the submission process the consensus sequences were inspected for chimera and putative chimera were removed from the dataset, which resulted in 750 unique sequences individually accessible under the GenBank numbers KJ599874-KJ600623 or as a set using the PopSet database (<http://www.ncbi.nlm.nih.gov/>).

### 2.6 Fluorescence in situ hybridization (FISH)

The same samples as used for the DNA extraction were used for fluorescence in situ hybridization (FISH). The samples were fixed for 2 hours at room temperature [32] with 4 % paraformaldehyde for Gram-negative bacteria. Hybridisation with fluorochrome (Cy5)-labelled oligonucleotide probes was carried out following the protocols described by [33] and [34] with modifications for solid samples. In brief, samples were hybridized in caps not on

slides with the appropriate volume of hybridization solution to submerge the samples completely. With sterile forceps they were then dipped in washing solution to remove the adhering hybridization buffer, followed by a washing step in 2 ml fresh washing buffer. For the microscopic observations, the FISH stained graphite pieces were embedded in Citifluor (Citifluor Ltd., Canterbury, UK) and observed with a confocal laser scanning microscope (CLSM).

The 23S rRNA targeted probe GAM-42a was labelled with Cy5 and always used with its unlabelled competitor BET-42a-Oligo [33]. FISH labelled samples were then stained for 10 minutes in the dark with the DNA binding dye Syto Orange 80 (Molecular Probes, Invitrogen, Carlsbad, USA) at a concentration of 5  $\mu\text{M}$  in 10 mM Tris, 1 mM EDTA (pH 8.0) and subsequently washed twice with ultrapure water.

The fluorescently labelled cells were detected using a Zeiss LSM510. An argon ion laser supplied 488-nm illumination and a helium-neon laser provided 543 nm, which were both used for Syto orange excitation. A second helium-neon laser at 633 nm was used for Cy5. For each hybridisation probe GAM-42a labelled with Cy5 (blue) was combined with a Syto orange DNA staining (red and green). While FISH using probe GAM-42a targets only  *$\gamma$ -Proteobacteria* with high ribosomal content, which are those with active protein biosynthesis, the DNA binding staining Syto orange labels all bacteria. The binding of both fluorophores resulted in a bright yellow to white staining of the target cells.

### 3. Results

#### 3.1 *Oxygen reducing biocathodes performed best using unmodified electrodes*

Oxygen reducing biocathodes developed on all electrodes. Before inoculation, background current densities at 0.15V were lower than 10 mA/m<sup>2</sup>. After a start-up time of 20 days, biocathodes reached stable catalytic currents ranging from ca. 200 to 900 mA/m<sup>2</sup> (figures 1 and 2). Control experiments in which N<sub>2</sub> gas was supplied to the developed biocathodes resulted in minimal current densities of ~ 10 mA/m<sup>2</sup> for all biocathodes i.e. a loss of >95% of activity. Moreover, control experiments in which no inoculum was added but air sparging was present also resulted in background current densities of ca. 10 mA/m<sup>2</sup> up to -0.1 V (data not shown). Both lines of evidence indicate that the microorganisms on the cathode were responsible for drawing a current while using O<sub>2</sub> as an electron acceptor. The unmodified electrode performed better compared to all other modified graphite electrodes, regardless of the surface modification (figure 1). The performance of the unmodified biocathode was not similar to experiments applying the same inoculum source and experimental set-up and operation [6, 9]. These earlier studies reached an average current range of 244  $\pm$  53 mA/m<sup>2</sup> between 10 to 60 operation days. Evidently, in our study, the comparable unmodified biocathode reached a 3 times higher current density. This can be explained by a variation of the inoculum composition due to changing operational conditions of the wastewater treatment plant (WWTP) from which both inocula originated. It is well known that variable operating conditions at WWTPs result in shifting microbial populations [35, 36].

“here figure 1”

“here figure 2”

#### 3.2 *Biofilms containing mostly $\gamma$ -Proteobacteria developed on the electrodes*

As expected from their catalytic performance, SEM analysis revealed that biofilms were formed at the unmodified as well as at the modified electrodes (figure 3). The biofilm

(approx. 20  $\mu\text{m}$  estimated from SEM) with a high density of bacteria on the electrode is likely related to the high current density. SEM observations of an oxygen reducing biocathode in earlier work showed only sparse microbial coverage [19]. In case the catalysis of oxygen reducing biocathodes is limited by the amount and activity of electrochemically active bacteria, a well-established biofilm is needed to improve the catalytic performance.

Confocal laser scanning microscopy of all five biocathode samples indicated variable biofilm thickness and coverage depending on the surface modification. From these micrographs the weakest biofilm in terms of estimated cell density and thickness ( $<5 \mu\text{m}$ ) could be detected on the N-0.5 electrodes (figure 4 A and table 1 for electrode nomenclature), followed by the N-20 (about 5  $\mu\text{m}$  thick biofilms) and the D-20 and D-0.5 (both about 10  $\mu\text{m}$  thick biofilms). The largest biofilm with an average thickness of 15-20  $\mu\text{m}$  and a maximum of up to 30  $\mu\text{m}$  was detected on the unmodified graphite plate. FISH staining was positive for an active  $\gamma$ -*Proteobacteria* subpopulation increasingly dominating with greater biofilm thickness (figure 4 B), which also could explain the higher performance of the biocathodes.

“here figure 3”

“here figure 4”

### 3.3 *Microbial communities showed a clear distinction between the inoculum, the recirculation liquid and the enriched communities in the biofilms*

Initial screening of the cathodic microbial communities by means of DGGE showed a marked distinction between the inoculum and the enriched microbial communities after 40 days of operation. All communities were clearly different (i.e. lower richness (Rr) and a higher organization (Co) [26]) compared to the inoculum but common bands could be detected among all communities (figure 5). A closer examination revealed that all well performing cathode biofilms were dominated by one common band (arrow head, figure 5). These communities had a low richness (max. 33) and a low evenness (min. 48). The cathodic biofilm of N-0.5 deviated from all other biofilms and clustered with all liquid samples. This indicates that neither selection nor differentiation took place during development of this community over 40 days.

“here figure 5”

Interestingly, after the unmodified electrode, hydrophobic modifications (i.e. cathodes modified with 4-decyl aryl diazonium: D-20 and D-0.5) of the cathode surface produced the highest current densities. This difference was however not directly observed in the DGGE of the biofilm. All biofilm communities, except for that developed on N-0.5 (low degree modified hydrophilic cathode), showed a similar microbial community composition. This indicates that although the same microorganisms were present, the reasons for the performance differences need to be sought in a varying biofilm thickness and coverage associated with differing quantities of bacteria from the various groups on the electrodes. Directly related to this, the electrode modifications might also influence the performance by impacting biofilm attachment to the electrode and/or associated electron transfer kinetics.

### 3.4 *The best performing biocathode ( $0.9\text{A}/\text{m}^2$ ) reached the highest domination (60.7 %) of a monophyletic group of $\gamma$ -*Proteobacteria**

Rarefaction curves clearly levelled off, indicating sufficient depth of the sequencing analysis (supplementary figure S1). Analysing the sequencing data, the dominance of a yet unclassified group of bacteria belonging to the  $\gamma$ -*Proteobacteria* was most striking. It was found to be highly abundant in the biofilm samples from the 4 best performing cathodes (N-

20, D-0.5, D-20, unmodified) with a relative abundance of up to 60.7 % detected for the best biocathode (unmodified) which reached a current density of 0.9 A/m<sup>2</sup>. In the biofilms on this unmodified electrode also Simpson and Shannon indices were lowest compared to all other samples. Accordingly, the overall highest Simpson and Shannon index values for all analysed samples were found for the worst performing biocathode N-05, where also only minor amounts of the unclassified  $\gamma$ -*Proteobacteria* group could be detected (table 2). The dominant band in the DGGE analysis in the biofilm samples from the well performing cathodes (figure 5) also reflected such a dominating group and therefore supported the 454 sequencing findings.

Furthermore, there were several abundant genera (> 5 %) detected in the biofilm samples from the cathodes, mainly *Brachymonas* ( $\beta$ -*Proteobacteria*, *Comamonadaceae*), *Anaerostipes* (*Firmicutes*, *Veillonellaceae*), and *Azospira* ( $\beta$ -*Proteobacteria*, *Rhodocyclaceae*), but none of these were present on all biocathode samples or solely restricted to the samples of the well performing ones (see GenBank/PopSet database for details).

In the liquid catholyte samples the genus *Brachymonas* was found to be present in large numbers in all five samples as well as in the inoculum, being the most abundant in three of them (N-20, D-20, and D-0.5). The sequencing reads showed the highest similarity to *B. denitrificans*. Members of this genus are characterized as aerobic chemoorganotrophs with a strictly respiratory type of metabolism using oxygen as the terminal electron acceptor [37, 38].

“Here table 2”

#### 4. Discussion

As all sequencing results in this study were obtained from one single sampling time-point without parallels, all abundance values must be interpreted with due care. But even with this necessary caution the detected  $\gamma$ -*Proteobacteria* can be considered as strikingly dominant in four out of five analysed samples. Furthermore, the found sequences in the biofilm show highest similarity to several sequences from diverse geographical origins and habitats, including a coal degrading community in Australia (JQ309095), as well as leachate sediments [39], coking wastewater [40] and also a biocathode community in China [41] (figure 6).

“here figure 6”

All these sequences have in common that they were derived from uncultivated bacteria forming a distinct monophyletic group within cluster 2 of the  $\gamma$ -*Proteobacteria*. Within this group sequence similarities all range above 96.9 %, which means they most probably belong to one genus (>95 %) and might even represent one single species (>97 %). To the next phylogenetic relative within the  $\gamma$ -*Proteobacteria*, *Alkalilimnicola ehrlichii* (NR\_074775.1), the highest similarity is 94.3 % which is already below genus level (supplementary table S1). Therefore this group of 16S sequences might very well represent a novel but so far completely uncultivated bacterial family. However, the taxonomy of cluster 2 within the  $\gamma$ -*Proteobacteria* is problematic and under current change and discussion up to order level (*Xanthomonadales*) [42], which makes a correct phylogenetic assignment of newly found 16S sequences very difficult. Therefore we decided to label the found sequences as belonging to unclassified  $\gamma$ -*Proteobacteria* until a more permanent taxonomy has been settled.

Some bacterial genera that have already been described to be connected with oxygen reducing biofilms, like *Enterobacter*, *Pseudomonas* [17], or *Acidovorax*, *Acinetobacter* [19] as well as *Desulfobulbus* [43], were present only in minor amounts in some but not all samples. Other



genera, e.g. *Roseobacter*, *Halomonas*, *Silicibacter*, *Sulfitobacter* [44], which have been detected previously in electro-active biofilms formed in seawater, were not found at all in the studied samples, which might be also explained by the absence of these species in the initial inoculum coming from a wastewater treatment plant.

The putative relationship between the high current densities (to our best knowledge, the highest current densities for flat-plate oxygen biocathodes documented so far) and high percentages of colonization by the found unclassified  $\gamma$ -*Proteobacteria* indicates a microorganism adapted to become dominant in our system. Likely, these microorganisms gain their energy from oxygen reduction while accepting electrons from the cathode. Since a full electron and carbon balance was not elucidated, we cannot clarify whether the indicative dominant species was autotrophic or not. The formed biofilm was estimated to be rather thick (20  $\mu\text{m}$ ) and appeared to be porous (figure 3 and 4), enabling oxygen diffusion and possibly advection within the biofilm. Biocathode research postulated that diffusion of oxygen into biofilms could limit performance assuming biofilm thicknesses of beyond 56  $\mu\text{m}$  [9]. Since the biofilms in this work were thinner, it is expected that oxygen could reach bacterial cells on the cathode electrode surface. Nevertheless, denitrification was thermodynamically feasible. Thus, there might be anoxic areas within the biofilm which could as well allow denitrification processes [45] fuelled by the nitrate transferred with the inoculated nitrifying sludge and possibly produced during nitrification of  $\text{NH}_4\text{Cl}$  from the supplied catholyte. At a current density of 400  $\text{mA}/\text{m}^2$  it would take 16.6 days to reduce all nitrate theoretical producible. An interplay with the nitrifying *B. denitrificans* or other nitrifying species found in the catholyte, which is clearly oxic, could provide additional nitrate for anaerobic denitrification in the anoxic zones of the biofilm. However, our performed experiments lasted for 40 days and showed higher current densities  $> 400 \text{ mA}/\text{m}^2$  which supports the development of an actual oxygen reducing biocathode. To confirm whether oxygen reduction indeed occurred, the catholyte was flushed with  $\text{N}_2$  gas to create anoxic conditions. This resulted in a current drop to a minor current density of less than 10  $\text{mA}/\text{m}^2$  (data not shown). This demonstrates that the performance of the bioelectrochemical cell was principally a result of bioelectrocatalysed oxygen reduction. Still, bioelectrocatalytic denitrification may play a small role.

Interestingly, in the work of Xia et al. [41] very similar 16S-rDNA sequences have been obtained from oxygen reducing biocathodes operated at three different set electrode potentials. However, these sequences have been clearly misassigned to *Thiorhodospira*, a genus which is only very distantly related to the found sequences (90.9 % similarity to the type species of the genus, *Thiorhodospira sibirica*, AJ006530). In the biofilms of the biocathodes described by Xia et al. [41] up to 13 % of the sequences could be identified as belonging to the same group of bacteria as in this work. Furthermore, increasing current density correlated with higher abundance of these sequences, although the dominance was not as pronounced as in the present system and *Bacteroidetes* were in that case more numerous. The current density in the system of Xia et al. [41] was lower than 370  $\text{mA}/\text{m}^2$  (calculated from polarisation curve figure 2, day 106 at 3.7 mA) compared to 900  $\text{mA}/\text{m}^2$  in our best biocathode. As in our lower performing biocathodes also considerably less of the specific  $\gamma$ -proteobacterial sequences could be found, it is tempting to speculate that the lower current density detected by Xia et al. [41] was also due to the lower abundance of these unclassified  $\gamma$ -*Proteobacteria*. Variations in the set potential +150 mV vs. Ag/AgCl in our study compared to +60 mV vs. SCE (approx. +17 mV vs. Ag/AgCl), -100 mV vs. SCE (approx. -67 mV vs. Ag/AgCl), inoculum (aerobic sludge compared to aerobic sludge plus previously enriched biocathode consortium) as well as the set-up and chemical surface properties of the graphite might account for the observed differences in colonization density. Wang et al. [46] and Zhang et al. [47] revealed that *Proteobacteria* were most abundant in a mixed culture oxygen reducing biocathode biofilms. These results support the likely biocatalytic role of species belonging to the genus of *Proteobacteria*. A very recent study by Rimboud et al. [48]

described a similar phenomenon as was found in the present study, that the worst performing biocathodes were showing the highest bacterial diversities in their biofilm, and unclassified  $\gamma$ -*Proteobacteria* were claimed to be significant components of the analysed biocathodes. The use of ammonium as a nitrogen source in this work and Rimboud's electrolyte can explain the relative high abundance of  $\gamma$ -*Proteobacteria* since they are well-known ammonium oxidizers. The role of ammonium (and possibly oxidized N-compounds) with respect to electron transfer pathways and its role in selection pressure in oxygen reducing biocathodes needs to be further investigated.

Since in our study the same inoculum was used for each experiment the surface modification seems to play a role in the differing bioelectrochemical performance. The given experimental results indicate that the presence of the modifier on the electrode surface had a detrimental influence on the development and performance of oxygen reducing biocathodes. It is to be stressed that although the modified electrodes all performed worse than the unmodified one, all were biocatalytic, and all modification types and extents clearly affected biocatalysis. In a previous study, dealing with the reduction of aryl diazonium salts at the anodic side of a MFC, we have shown that the type and degree of electrode modification had a critical influence on bioanode performance [21]. Indeed, the use of a high degree of modification may decrease the electron transfer rate between the modified surface and the biofilm. For this reason, two degrees of modification were applied in the present work. Practically, one way to obtain different degrees of modification consists of changing the number of recurrent cyclic voltammetry sweeps applied. As described in the methods section two degrees of modification were chosen for this study (20 or 0.5 cycles from 0.4 to -0.2 V). However, and contrary to the work reported in reference [21], the amount of modifier has not been optimized in the present study. It is possible that more modifier is needed at the electrode to outperform the unmodified one. We nevertheless know from work reported in reference [21] that too much modifier on the surface (above optimum) impedes fast electron transfer between the biofilm and the electrode, or even its connection altogether. However, the fact that chemical modification of the electrode surface affects biocatalysis may point to a possible direct electrical connection between the electroactive microbial catalyst and the electrode as in chemolithotrophic metabolism. The identification and study of the microbial biocatalyst is needed to confirm this hypothesis. To establish conclusions on the role of the modification further parallel and duplicated experiments are necessary and will be carried out.

In many cases biofilm development of wastewater and soil isolates was shown to be increased on hydrophilic surfaces [49-51], but, in contrast, unmodified and to a lesser extent more hydrophobic surfaces were preferred by the dominant bacterial strains in this study resulting in thicker biofilms. In the work by Petrackova et al. [51] *Streptomyces* were also found to colonize hydrophobic surfaces but this resulted in an altered protein expression. A similar phenomenon might also play a role in the selectivity of the surfaces used in this work for the specific group of  $\gamma$ -*Proteobacteria*, which were initially inoculated in equal amounts by using the same sludge. Especially hydrophilic surfaces do not seem to be ideal for the enrichment of these bacteria. This could be due to an influence of the surface modification on the expression of proteins involved in the electrochemical competence of this strain. Alternatively or additionally, the initial attachment of the bacteria might be hampered by hydrophilic surfaces as bacteria only tend to attach to hydrophilic surfaces if their surface energy is higher than in the suspending medium [52, 53]. However, in order to verify this, an isolation of the found strain would be necessary, which was to date not successful, probably due to its very specific growth requirements.

## 5. Conclusions

In conclusion, we found a putative relationship between the performance of biocathodes and the abundance of bacteria belonging to a monophyletic group of unclassified  $\gamma$ -*Proteobacteria*. In the best performing biocathode with a current density of  $0.9 \text{ A/m}^2$  60.7 % of all found 16S rDNA sequences belonged to this bacterial group. According to the inoculation and operational conditions it is possible that the dominant species in the well performing cathodes is gaining its energy from oxygen reduction via electron transfer from the cathode. This could determine its competitive advantage in this specialized habitat. Additionally, depending on oxygen levels within the biofilms, denitrification supported by nitrification processes in an oxygen rich surrounding catholyte seems to play a minor role. Unmodified and to a lesser extent also the more hydrophobic graphite surfaces, appeared to favor biofilm development and enrichment of electrochemically active species. Most importantly, all modifications of the electrode surface negatively impacted the biocatalytic performance which would be consistent with a direct interaction between the cathode and the biofilm and with a chemolithotrophic metabolism of the microbial catalyst. Probably due to their specific cultivation demands and selective natural habitats the found cluster within the  $\gamma$ -*Proteobacteria* has not been well studied so far. Our findings highlight that oxygen reducing biocathodes can be an important habitat for organismic discoveries. In addition, the detailed understanding of the microbiology and physiology of these catalytic biofilms together with the characterisation of the microbial-cathode interface may be unravelled in part by means of surface modifications. Finally, mastering the development of high current density, stable oxygen reducing biocathodes is a prerequisite for operating completely biological MFCs with microbial catalysis both at anode and cathode.

### Acknowledgments

This research is supported by funding from the European Union's Seventh Framework Programme FP7/2007-2013 under Grant Agreement No. 226532. Matthieu Picot also acknowledges Rennes Métropole for a visiting grant to Wageningen University. Jana De Bodt is acknowledged for technical assistance at UGent. We thank anonymous reviewers for their constructive comments.

## References

- [1] K. Rabaey, W. Verstraete, Microbial fuel cells: novel biotechnology for energy generation, *Trends Biotechnol*, 23 (2005) 291-298.
- [2] D.P.B.T.B. Strik, H.V.M. Hamelers, J.F.H. Snel, C.J.N. Buisman, Green electricity production with living plants and bacteria in a fuel cell, *Int J Energ Res*, 32 (2008) 870-876.
- [3] L. De Schampelaire, L. Van den Bossche, H.S. Dang, M. Hofte, N. Boon, K. Rabaey, W. Verstraete, Microbial fuel cells generating electricity from rhizodeposits of rice plants, *Environ Sci Technol*, 42 (2008) 3053-3058.
- [4] Y.R.J. Thomas, M. Picot, A. Carer, O. Berder, O. Sentieys, F. Barrière, A single sediment-microbial fuel cell powering a wireless telecommunication system, *J Power Sources*, 241 (2013) 703-708.
- [5] B.E. Logan, B. Hamelers, R.A. Rozendal, U. Schröder, J. Keller, S. Freguia, P. Aelterman, W. Verstraete, K. Rabaey, Microbial fuel cells: Methodology and technology, *Environ Sci Technol*, 40 (2006) 5181-5192.
- [6] D.P.B.T.B. Strik, M. Picot, C.J.N. Buisman, F. Barrière, pH and temperature determine performance of oxygen reducing biocathodes, *Electroanal*, 25 (2013) 652-655.
- [7] A. Bergel, D. Féron, A. Mollica, Catalysis of oxygen reduction in PEM fuel cell by seawater biofilm, *Electrochem Commun*, 7 (2005) 900-904.
- [8] L. Lapinonnière, M. Picot, F. Barrière, Enzymatic versus microbial bio-catalyzed electrodes in bio-electrochemical systems, *ChemSusChem*, 5 (2012) 995-1005.
- [9] A. Ter Heijne, D.P.B.T.B. Strik, H.V.M. Hamelers, C.J.N. Buisman, Cathode potential and mass transfer determine performance of oxygen reducing biocathodes in microbial fuel cells, *Environ Sci Technol*, 44 (2010) 7151-7156.
- [10] A. Ter Heijne, O. Schaezle, S. Gimenez, F. Fabregat-Santiago, J. Bisquert, D.P.B.T.B. Strik, F. Barrière, C.J.N. Buisman, H.V.M. Hamelers, Identifying charge and mass transfer resistances of an oxygen reducing biocathode, *Energy Environ Sci*, 4 (2011) 5035-5043.
- [11] P. Liang, M. Fan, X. Cao, X. Huang, Evaluation of applied cathode potential to enhance biocathode in microbial fuel cells, *J Chem Technol Biot*, 84 (2009) 794-799.
- [12] X. Xia, J.C. Tokash, F. Zhang, P. Liang, X. Huang, B.E. Logan, Oxygen-reducing biocathodes operating with passive oxygen transfer in microbial fuel cells, *Environ Sci Technol*, 47 (2013) 2085-2091.
- [13] B. Erable, A. Féron, A. Bergel, Microbial catalysis of the oxygen reduction reaction for microbial fuel cells: a review, *ChemSusChem*, 5 (2012) 975-987.
- [14] M. Rosenbaum, F. Aulenta, M. Villano, L.T. Angenent, Cathodes as electron donors for microbial metabolism: which extracellular electron transfer mechanisms are involved?, *Bioresour Technol*, 102 (2011) 324-333.
- [15] E. Lyautey, A. Cournet, S. Morin, S. Bouletreau, L. Etcheverry, J.Y. Charcosset, F. Delmas, A. Bergel, F. Garabetian, Electroactivity of phototrophic river biofilms and constitutive cultivable bacteria, *Appl Environ Microbiol*, 77 (2011) 5394-5401.
- [16] A. Cournet, M.-L. Délia, A. Bergel, C. Roques, M. Bergé, Electrochemical reduction of oxygen catalyzed by a wide range of bacteria including Gram-positive, *Electrochem Commun*, 12 (2010) 505-508.
- [17] S. Parot, O. Nercessian, M.L. Delia, W. Achouak, A. Bergel, Electrochemical checking of aerobic isolates from electrochemically active biofilms formed in compost, *J Appl Microbiol*, 106 (2009) 1350-1359.
- [18] A. Cournet, M. Bergé, C. Roques, A. Bergel, M.-L. Délia, Electrochemical reduction of oxygen catalyzed by *Pseudomonas aeruginosa*, *Electrochim Acta*, 55 (2010) 4902-4908.
- [19] K. Rabaey, S.T. Read, P. Clauwaert, S. Freguia, P.L. Bond, L.L. Blackall, J. Keller, Cathodic oxygen reduction catalyzed by bacteria in microbial fuel cells, *ISME J*, 2 (2008) 519-527.

- [20] S. Carbajosa, M. Malki, R. Caillard, M.F. Lopez, F.J. Palomares, J.A. Martin-Gago, N. Rodriguez, R. Amils, V.M. Fernandez, A.L. De Lacey, Electrochemical growth of *Acidithiobacillus ferrooxidans* on a graphite electrode for obtaining a biocathode for direct electrocatalytic reduction of oxygen, *Biosens Bioelectron*, 26 (2010) 877-880.
- [21] M. Picot, L. Lapinsonnière, M. Rothballer, F. Barrière, Graphite anode surface modification with controlled reduction of specific aryl diazonium salts for improved microbial fuel cells power output, *Biosens Bioelectron*, 28 (2011) 181-188.
- [22] D. Bélanger, J. Pinson, Electrografting: a powerful method for surface modification, *Chem Soc Rev*, 40 (2011) 3995-4048.
- [23] S. Baranton, D. Bélanger, Electrochemical derivatization of carbon surface by reduction of in situ generated diazonium cations, *J Phys Chem B*, 109 (2005) 24401-24410.
- [24] N. Boon, J. Goris, P. De Vos, W. Verstraete, E.M. Top, Bioaugmentation of activated sludge by an indigenous 3-chloroaniline-degrading *comamonas testosteroni* strain, *i2gfp*, *Appl Environ Microbiol*, 66 (2000) 2906-2913.
- [25] G. Muyzer, E.C. Dewaal, A.G. Uitterlinden, Profiling of complex microbial-populations by denaturing gradient gel-electrophoresis analysis of polymerase chain reaction-amplified genes-coding for 16s ribosomal-RNA, *Appl Environ Microbiol*, 59 (1993) 695-700.
- [26] S. Read, M. Marzorati, B.C.M. Guimaraes, N. Boon, Microbial resource management revisited: Successful parameters and new concepts, *Appl Microbiol Biotechnol*, 90 (2011) 861-871.
- [27] D.J. Lane, 16S/23S rRNA sequencing, in: E. Stackebrandt, M. Goodfellow (Eds.) *Nucleic Acids Techniques in Bacterial Systematics*, John Wiley & Sons, Chichester, 1991, pp. 115-147.
- [28] S. Juretschko, G. Timmermann, M. Schmid, K.H. Schleifer, A. Pommerening-Röser, H.P. Koops, M. Wagner, Combined molecular and conventional analyses of nitrifying bacterium diversity in activated sludge: *Nitrosococcus mobilis* and *Nitrospira*-like bacteria as dominant populations, *Appl Environ Microbiol*, 64 (1998) 3042-3051.
- [29] R.A. Timmers, M. Rothballer, D.P. Strik, M. Engel, S. Schulz, M. Schloter, A. Hartmann, B. Hamelers, C. Buisman, Microbial community structure elucidates performance of *Glyceria maxima* plant microbial fuel cell, *Appl Microbiol Biotechnol*, 94 (2012) 537-548.
- [30] O. Strunk, W. Ludwig, ARB: A software environment for sequence data [www.document], <http://www.mikro.biologie.tu-muenchen.de>, (1997).
- [31] Ø. Hammer, D.A.T. Harper, P.D. Ryan, PAST: Paleontological statistics software package for education and data analysis, *Palaeontol Electron*, 4 (2001) 9pp.
- [32] R. Amann, N. Springer, W. Ludwig, H.D. Gortz, K.-H. Schleifer, Identification *in situ* and phylogeny of uncultured bacterial endosymbionts, *Nature*, 351 (1991) 161-164.
- [33] W. Manz, R. Amann, W. Ludwig, M. Wagner, K.-H. Schleifer, Phylogenetic oligodeoxynucleotide probes for the major subclasses of proteobacteria: problems and solutions, *Syst Appl Microbiol*, 25 (1992) 593-600.
- [34] R.I. Amann, B. Zarda, D.A. Stahl, K.-H. Schleifer, Identification of individual prokaryotic cells by using enzyme-labeled, rRNA-targeted oligonucleotide probes, *Appl Environ Microbiol*, 58 (1992) 3007-3011.
- [35] D.M. Stamper, M. Walch, R.N. Jacobs, Bacterial population changes in a membrane bioreactor for graywater treatment monitored by denaturing gradient gel electrophoretic analysis of 16S rRNA gene fragments, *Appl Environ Microbiol*, 69 (2003) 852-860.
- [36] K. Kaewpipat, C.P.L. Grady, Microbial population dynamics in laboratory-scale activated sludge reactors, *Water Sci Technol*, 46 (2002) 19-27.
- [37] A. Hiraishi, J. Sugiyama, Y.K. Shin, *Brachymonas denitrificans* gen. nov., sp. Nov., an aerobic chemoorganotrophic bacterium which contains rhodoquinones, and evolutionary relationships of rhodoquinone producers to bacterial species with various quinone classes, *J Gen Appl Microbiol*, 41 (1995) 99-117.

- [38] M. Halpern, T. Shaked, P. Schumann, *Brachymonas chironomi* sp. nov., isolated from a chironomid egg mass, and emended description of the genus *Brachymonas*, *Int J Syst Evol Microbiol*, 59 (2009) 3025-3029.
- [39] J. Liu, W. Wu, C. Chen, F. Sun, Y. Chen, Prokaryotic diversity, composition structure, and phylogenetic analysis of microbial communities in leachate sediment ecosystems, *Appl Microbiol Biotechnol*, 91 (2011) 1659-1675.
- [40] Y. Bai, Q. Sun, R. Sun, D. Wen, X. Tang, Bioaugmentation and adsorption treatment of coking wastewater containing pyridine and quinoline using zeolite-biological aerated filters, *Environ Sci Technol*, 45 (2011) 1940-1948.
- [41] X. Xia, Y. Sun, P. Liang, X. Huang, Long-term effect of set potential on biocathodes in microbial fuel cells: electrochemical and phylogenetic characterization, *Bioresource Technol*, 120 (2012) 26-33.
- [42] B.J. Tindall, The family name *Solimonadaceae* Losey et al. 2013 is illegitimate, proposals to create the names '*Sinobacter soli*' comb. nov. and '*Sinobacter variicoloris*' contravene the Code, the family name *Xanthomonadaceae* Saddler and Bradbury 2005 and the order name *Xanthomonadales* Saddler and Bradbury 2005 are illegitimate and notes on the application of the family names *Solibacteraceae* Zhou et al. 2008, *Nevskiaceae* Henrici and Johnson 1935 (Approved Lists 1980) and *Lysobacteraceae* Christensen and Cook 1978 (Approved Lists 1980) and order name *Lysobacteriales* Christensen and Cook 1978 (Approved Lists 1980) with respect to the classification of the corresponding type genera *Solibacter* Zhou et al. 2008, *Nevskia* Famintzin 1892 (Approved Lists 1980) and *Lysobacter* Christensen and Cook 1978 (Approved Lists 1980) and importance of accurately expressing the link between a taxonomic name, its authors and the corresponding description/circumscription/emendation, *Int J Syst Evol Microbiol*, 64 (2014) 293-297.
- [43] C. Pfeffer, S. Larsen, J. Song, M. Dong, F. Besenbacher, R.L. Meyer, K.U. Kjeldsen, L. Schreiber, Y.A. Gorby, M.Y. El-Naggar, K.M. Leung, A. Schramm, N. Risgaard-Petersen, L.P. Nielsen, Filamentous bacteria transport electrons over centimetre distances, *Nature*, 491 (2012) 218-221.
- [44] S. Parot, I. Vandecastelaere, A. Cournot, M.L. Delia, P. Vandamme, M. Berge, C. Roques, A. Bergel, Catalysis of the electrochemical reduction of oxygen by bacteria isolated from electro-active biofilms formed in seawater, *Bioresource Technol*, 102 (2011) 304-311.
- [45] P. Clauwaert, K. Rabaey, P. Aelterman, L. de Schampelaere, T.H. Pham, P. Boeckx, N. Boon, W. Verstraete, Biological denitrification in microbial fuel cells, *Environ Sci Technol*, 41 (2007) 3354-3360.
- [46] Z.J. Wang, Y. Zheng, Y. Xiao, S. Wu, Y.C. Wu, Z.H. Yang, F. Zhao, Analysis of oxygen reduction and microbial community of air-diffusion biocathode in microbial fuel cells, *Bioresource Technol*, 144 (2013) 74-79.
- [47] G.D. Zhang, Q.L. Zhao, Y. Jiao, K. Wang, D.J. Lee, N.Q. Ren, Biocathode microbial fuel cell for efficient electricity recovery from dairy manure, *Biosensors & bioelectronics*, 31 (2012) 537-543.
- [48] M. Rimboud, E. Desmond-Le Quemener, B. Erable, T. Bouchez, A. Bergel, The current provided by oxygen-reducing microbial cathodes is related to the composition of their bacterial community, *Bioelectrochemistry*, 102C (2014) 42-49.
- [49] Y.P. Chen, S. Li, Y.F. Ning, N.N. Hu, H.H. Cao, F. Fang, J.S. Guo, Start-up of completely autotrophic nitrogen removal over nitrite enhanced by hydrophilic-modified carbon fiber, *Appl Biochem Biotech*, 166 (2012) 866-877.
- [50] G.S. Lorite, R. Janissen, J.H. Clerici, C.M. Rodrigues, J.P. Tomaz, B. Mizaikoff, C. Kranz, A.A. de Souza, M.A. Cotta, Surface physicochemical properties at the micro and nano length scales: role on bacterial adhesion and *Xylella fastidiosa* biofilm development, *PloS one*, 8 (2013) e75247.

- [51] D. Petrackova, K. Buriankova, E. Tesarova, S. Bobkova, S. Bezouskova, O. Benada, O. Kofronova, J. Janecek, P. Halada, J. Weiser, Surface hydrophobicity and roughness influences the morphology and biochemistry of streptomycetes during attached growth and differentiation, *FEMS Microbiol Lett*, 342 (2013) 147-156.
- [52] D.R. Absolom, F.V. Lamberti, Z. Policova, W. Zingg, C.J. van Oss, A.W. Neumann, Surface thermodynamics of bacterial adhesion, *Appl Environ Microbiol*, 46 (1983) 90-97.
- [53] H.H. Tuson, D.B. Weibel, Bacteria-surface interactions, *Soft matter*, 9 (2013) 4368-4380.

ACCEPTED MANUSCRIPT

## Tables

**Table 1:** Given names of cathodes and summary of modifications.

Given name	N-20	N-0.5	D-20	D-0.5	Unmodified
Aryl diazonium salt	<b>4-nitro benzene diazonium</b>		<b>4-decyl aryl diazonium</b>		
Degree of modification (Number of applied cycles)	20	0.5	20	0.5	0
Contact angle (+/- 3°)	58°	66°	96°	79°	70°



**Table 2:** Table of the 454 sequencing results with phylum and family affiliations given in percent of total reads per sample with inoculum, catholyte and biofilm samples in comparison. Values are based on one single sampling. Simpson and Shannon diversity indices based on genus affiliations are given in the bottom rows. The dominant bacterial families are marked in light grey for inoculum including catholyte, and as medium grey for biofilms. The biofilm samples containing these families with an abundance of over 10 % are additionally printed in white on dark grey.

Phylum	Family	inoc. <sup>1</sup>		catholyte				biofilm				
		%	%	N-20	D-20	unm <sup>2</sup>	D-0.5	N-0.5	N-20	D-20	unm <sup>2</sup>	D-0.5
<i>Acidobacteria</i>	<i>IncertaeSedis</i>	1.1	4.6	1.9	3.1	6.9	11.3	3.6	3.6	11.1	8.5	4.6
<i>Actinobacteria</i>	<i>Micrococcaceae</i>	0	1.3	0	0.8	8.6	3.2	0	0	0	0	0
<i>Actinobacteria</i>	<i>Nocardiaceae</i>	0	3.3	10.7	5.0	4.6	10.3	0.6	0.4	0	3.2	2.0
<i>Chloroflexi</i>	<i>Anaerolineaceae</i>	3.4	0.9	0	4.4	0.7	24.6	0.5	0.4	8.6	0.3	6.8
<i>Firmicutes</i>	<i>Lachnospiraceae</i>	1.1	8.7	0	6.2	6.1	0	5.2	6.2	0.1	3.7	15.0
<i>Firmicutes</i>	<i>Ruminococcaceae</i>	0.4	8.4	0	3.6	4.4	0	4.4	4.2	0	2.6	8.7
<i>Firmicutes</i>	<i>Veillonellaceae</i>	0.4	8.7	0	8.0	5.4	0	6.3	7.6	0	4.2	16.3
<i>Proteobacteria</i>	<i>α Bradyrhizobiaceae</i>	0	0.3	4.4	0.6	1.7	0.7	0.2	0.3	0.3	1.9	0.6
<i>Proteobacteria</i>	<i>α IncertaeSedis</i>	0	1.3	0.3	1.0	0.9	0.7	0.6	0.6	0	0.2	1.5
<i>Proteobacteria</i>	<i>α Rhodobiaceae</i>	0.9	2.7	6.2	4.3	1.3	0.6	1.0	0	0	2.2	0.8
<i>Proteobacteria</i>	<i>β Alcaligenaceae</i>	6.4	0	0	0.3	0	0	0.4	0	0	0	0.7
<i>Proteobacteria</i>	<i>β Comamonadaceae</i>	41.0	20.5	52.4	13.7	21.9	16.4	7.9	5.9	1.9	24.6	5.3
<i>Proteobacteria</i>	<i>β Rhodocyclaceae</i>	10.7	10.5	5.3	11.1	11.3	3.6	9.1	10.4	2.5	10.1	9.0
<i>Proteobacteria</i>	<i>γ unclassified</i>	0.4	0	0.8	0	0.4	0	46.8	47.2	60.7	24.0	2.0
<i>Proteobacteria</i>	<i>γ Xanthomonadaceae</i>	1.3	4.5	6.3	3.6	3.8	7.2	1.9	1.8	2.2	3.6	1.8
	Simpson (1-D)	0.90	0.95	0.89	0.96	0.96	0.88	0.75	0.74	0.57	0.90	0.96
	Shannon (H)	3.11	3.48	2.65	3.47	3.69	2.64	2.44	2.35	1.49	3.02	3.68

<sup>1</sup> inoculum; <sup>2</sup> unmodified

## Figure Legends

**Figure 1:** Cathodic current density by surface (un)modified oxygen reducing biocathodes during polarisation (10 minutes equilibration time) after 20 days of operation. Green = unmodified; red = D-20; blue = D-0.5; black = N-20; magenta = N-0.5

**Figure 2:** Representative data of stable catalytic cathodic current densities at different oxygen reducing biocathodes operated at +0.150 V vs. Ag/AgCl after 20 days of operation. Green = unmodified; red = D-20; blue = D-0.5; black = N-20; magenta = N-0.5

**Figure 3:** Representative SEM pictures of oxygen reducing biofilms at biocathodes (A) a granule like cluster of microorganisms at the N-20 biocathode; (B) biofilm structure and coverage of the N-20 biocathode. Scale bar represents 10  $\mu\text{m}$ .

**Figure 4:** Representative confocal laser scanning micrographs of graphite samples taken from the N-0.5 (A) and unmodified (B) biocathodes. FISH probe GAM-42a labelled in Cy5, detecting most members of the class  *$\gamma$ -Proteobacteria*, is depicted in blue (top left picture), Syto orange DNA staining in red and green (top right and bottom left pictures). The overlay (bottom right picture) is shown as an orthogonal view created from a z-stack of xy-scans. The top view, framed in blue, shows one picture from the middle of this z-stack. The red and green lines represent vertical optical cuts through the stack, which results in the side view images framed in red and green, respectively. In these side views the blue line marks the vertical position, where the top view image is located within the z-stack.

The presence of fluorescent signals in all three channels (green, red, blue) identify active  *$\gamma$ -Proteobacteria*, while only two fluorescent colors (green and red, resulting in orange or yellow after overlay) mark all other bacteria or the inactive  *$\gamma$ -Proteobacteria*.

**Figure 5:** Clustering of DGGE patterns of the biofilm and planktonic microbial community based on the Pearson correlation coefficient. For further explanation of band numbers see text. Microbial resource management parameters (Co; Community organization and Rr; Richness) have been calculated according to Read et al.<sup>24</sup>

**Figure 6:** Phylogenetic allocation of the dominant sequences with the ARB software package. The dendrogram showing cluster 2 of the  *$\gamma$ -Proteobacteria* and outgroups is based on neighbour joining tree calculation. Bar indicates 10 % sequence divergence.

## Supplementary Material

**Supplementary figure S1:** Rarefaction curves for the sequenced samples.

**Supplementary table S1:** Matrix based on neighbour joining analysis showing pairwise distances for the obtained dominant biocathode sequences and selected closest relatives. Accession numbers are given in brackets. Species with similarities below genus level are marked in grey.

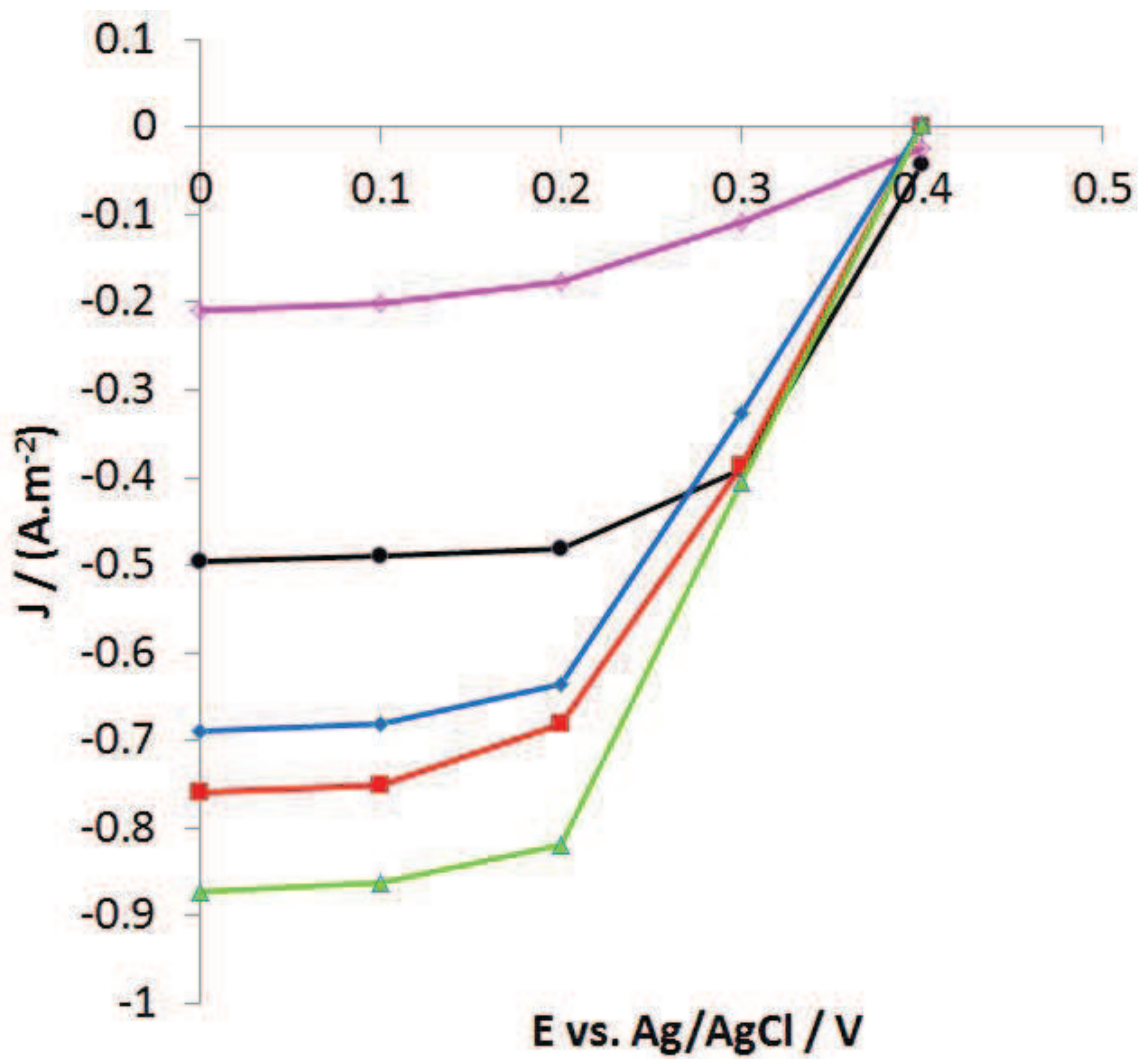


Figure 1

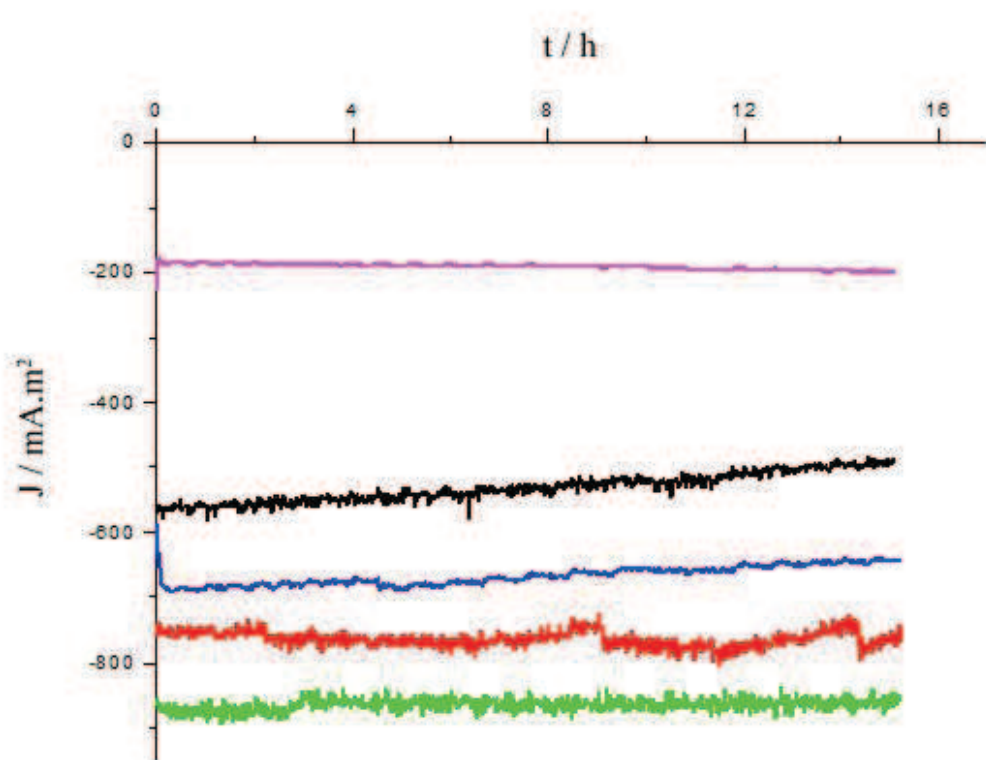


Figure 2

ACCEPTED

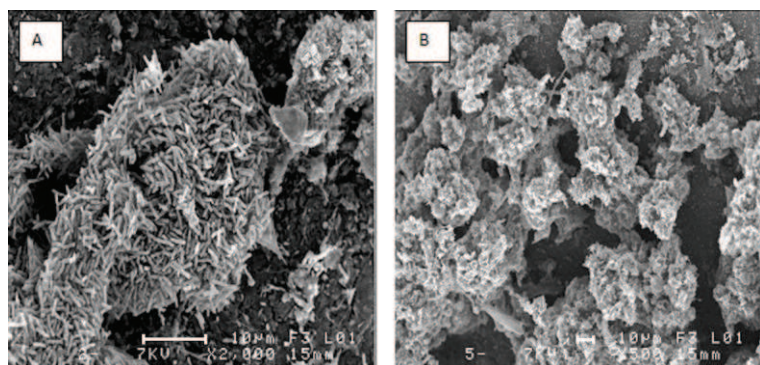


Figure 3

ACCEPTED MANUSCRIPT

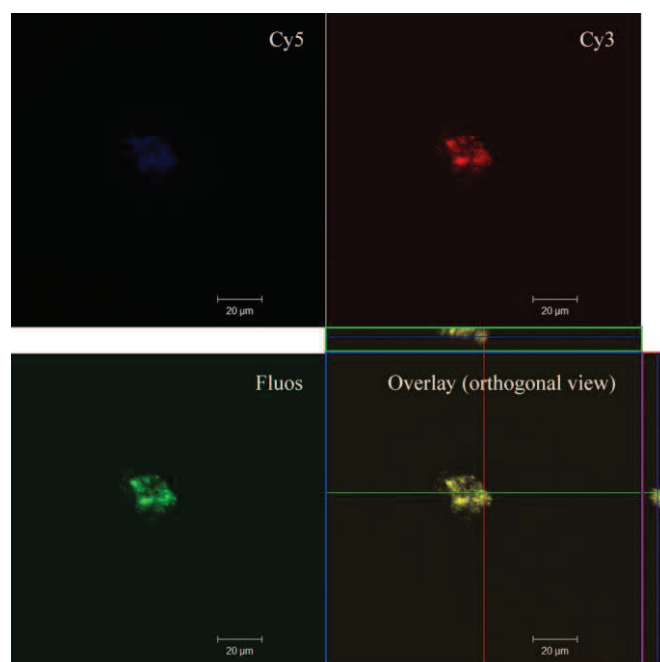


Figure 4A

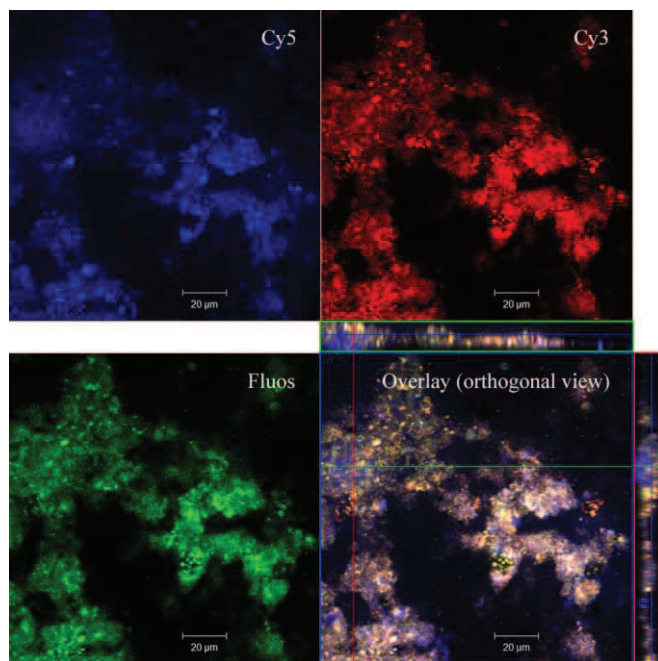


Figure 4B

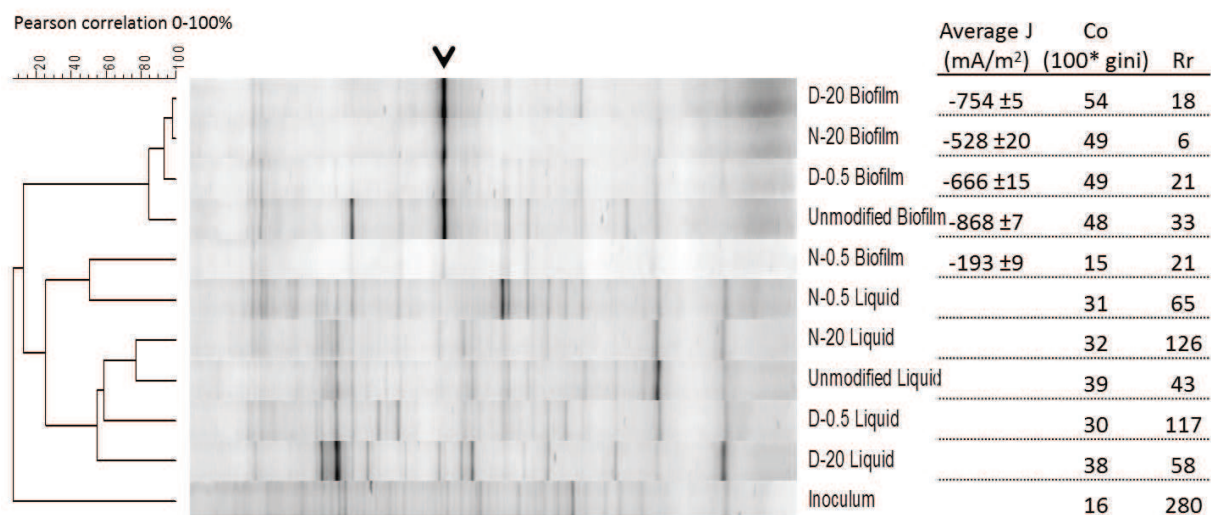


Figure 5

ACCEPTED MANUSCRIPT



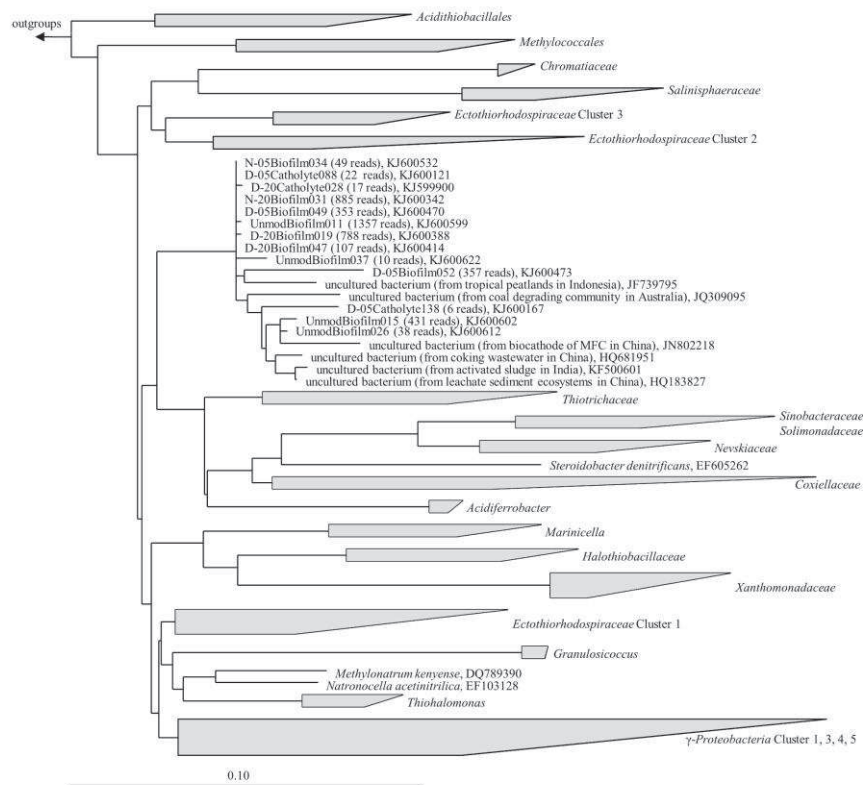


Figure 6

### Highlights

- Best oxygen reducing biocathode reached high current density (0.9 A/m<sup>2</sup>)
- Sequencing revealed relationship between microbiota and biocathode performance
- Domination of so far unclassified *γ-Proteobacteria* in best biocathode (60.7 %)
- This bacterial group was key-player for high performing oxygen reducing biocathode

ACCEPTED MANUSCRIPT