



**HAL**  
open science

# Reconfigurable slotted cylindrical waveguide and coaxial array antenna using plasma

Oumar Alassane Barro, Mohamed Himdi, Hamsakutty Vettikalladi

## ► To cite this version:

Oumar Alassane Barro, Mohamed Himdi, Hamsakutty Vettikalladi. Reconfigurable slotted cylindrical waveguide and coaxial array antenna using plasma. 13th European Conference on Antennas and Propagation (EuCAP), Mar 2019, Krakow, Poland. hal-02277948

**HAL Id: hal-02277948**

**<https://univ-rennes.hal.science/hal-02277948>**

Submitted on 2 Nov 2020

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Reconfigurable slotted cylindrical waveguide and coaxial array antenna using plasma

Oumar Alassane Barro<sup>1</sup>, and Mohamed Himdi<sup>1</sup>, and H. Vettikalladi<sup>2</sup>

<sup>1</sup>Institute of Electronics and Telecommunications of Rennes (IETR), UMR CNRS 6164, University of Rennes 1, 263 av. du General Leclerc, 35042 Rennes, France.

oumar-lassane.barro@univ-rennes1.fr, mohamed.himdi@univ-rennes1.fr

<sup>2</sup>Electrical Engineering Department, King Saud University, 2C-28, Riyadh, Saudia Arabia. hvettikalladi@ksu.edu.sa

**Abstract**—A novel reconfigurable cylindrical slotted waveguide antenna associated with plasma tube is proposed. The performance of the reconfigurable system is observed in terms of  $S_{21}$ , maximum realized gain, radiation patterns and total efficiency. It is shown that by switching ON or OFF the fluorescent lamp, we can change the antenna operating mode. When the plasma is OFF, we have the waveguide behavior with a cutoff frequency around 2.5 GHz and when the plasma is ON, the behavior become 50  $\Omega$  coaxial line. By adding slots, we obtain reconfigurable antenna working at 4 GHz and 1 GHz. The main idea is to obtain reconfigurable slotted cylindrical waveguide and coaxial array antenna using plasma

**Index Terms**—slot waveguide antenna, coaxial line, reconfigurability, plasma

## I. INTRODUCTION

Since many years, slotted waveguide antennas have been studied in the literature [1]–[7]. Many papers [8]–[12] proposed a waveguide filled by plasma in order to change the mode or as a protection against the high power. In our case, the waveguide is filled by plasma partially. The aim of this paper is to present simulation and experimental results to verify the performance in terms of radiation pattern, gain, S-parameters and efficiency of the reconfigurable slotted waveguide antenna using plasma tube. Two operating modes are offered by this antenna system depending the state of the plasma. Two behaviors can be also identified, a waveguide behavior when the plasma is OFF and a coaxial behavior when the plasma is ON. The paper is organized as follows: in section II, we describe the prototype and remind the used plasma model. The comparison between simulations and measurements of the metallic cylindrical tube filled by plasma is presented in section III. The Results for slot waveguide and coaxial antenna are presented in Section IV. A conclusion is given in section V.

## II. MODELING AND SIMULATIONS

The waveguide geometry is shown in Figure 1. The metallic tube has 70 mm diameter and the length is 620 mm. The plasma tube which is commercial fluorescent lamp is inserted inside the metallic tube (see Figs. 2(a) and 2(b)).

The height of the lamp is 590 mm and its diameter is 26 mm. The feeding system is composed by a metallic ring

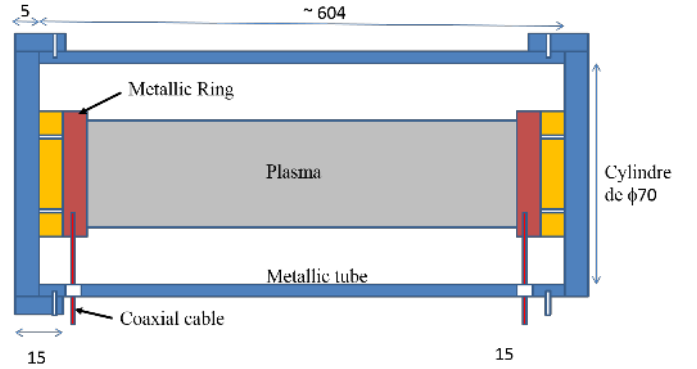


Fig. 1. Geometry of the system.

surrounding the lamp to its end and a coaxial cable is fixed to this metallic ring (see Fig. 2(b)) in order to provide RF signal. The realized prototype are shown in Figure 2(b).

For simulations performed with CST Microwave Studio, the tube containing the gas is made from loss glass with  $\epsilon_r = 4.82$ ,  $\tan \delta = 0.005$  and thickness of 0.5 mm. The plasma obeys to the Drude model defined by the two parameters (plasma angular frequency  $\omega_p$  and electron-neutral collision frequency  $\nu$ ) and these parameters give the complex permittivity  $\epsilon_r$  written in equation (1).


$$\epsilon_r = 1 - \frac{\omega_p^2}{\omega(\omega - j\nu)} \quad (1)$$

where  $\omega$  is the operating angular frequency.

Furthermore, we used the same Drude model as in [13]–[15], with the same parameters ( $\nu = 900$  MHz and  $\omega_p = 43.9823 \cdot 10^9$  rad/s).

## III. RESULTS AND DISCUSSION

First, we start to study the S parameters in order to find the behavior of the metal tube depending on the state of the plasma. Figure 3 shows  $S_{11}$  and  $S_{21}$  magnitude results in simulation in the cases plasma OFF and plasma ON.




(a)




(b)

Fig. 2. Realized models. (a) Feeding lamp. (b) Realized waveguide.

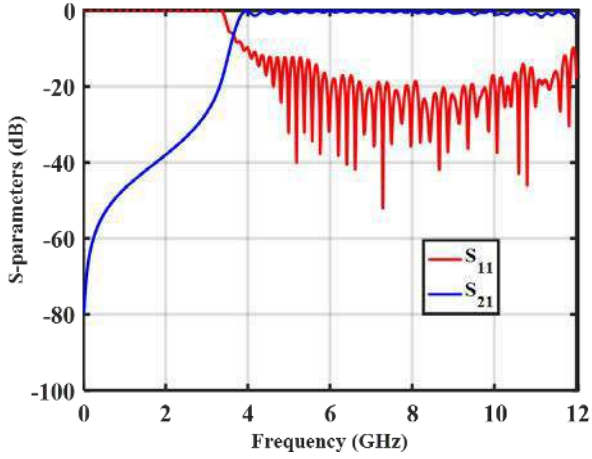


(a)

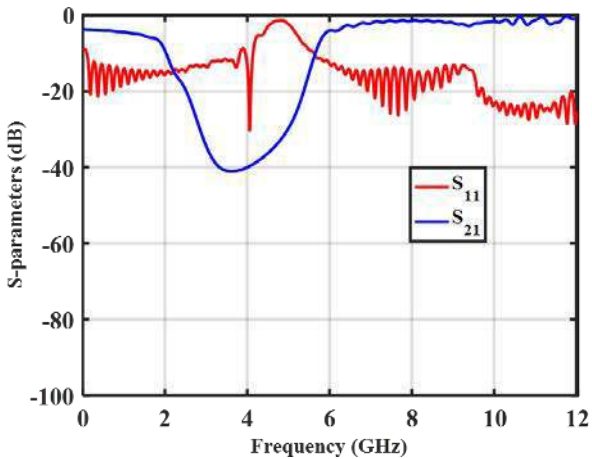

(b)


Fig. 3. Simulated  $S_{11}$  and  $S_{21}$  magnitude. (a) Plasma OFF. (b) Plasma ON.

We can notice that, in the plasma OFF case, we have expected results for a classical waveguide with a cutoff frequency around 2.5 GHz (see Fig. 3(a)). The Figure 3(b) shows the result in plasma ON case, we obtained the expected results for a coaxial but the stronger absorption is observed around 4 GHz. In order to validate the simulations results, the  $S_{21}$  measurements have been done in the plasma ON and OFF cases and shown in Figure 4. The simulations and measurements are in good agreement but we have more losses in measurement and the curve in plasma OFF shows a rise in low frequency, probably due to the prototype fabrication and feeding system.

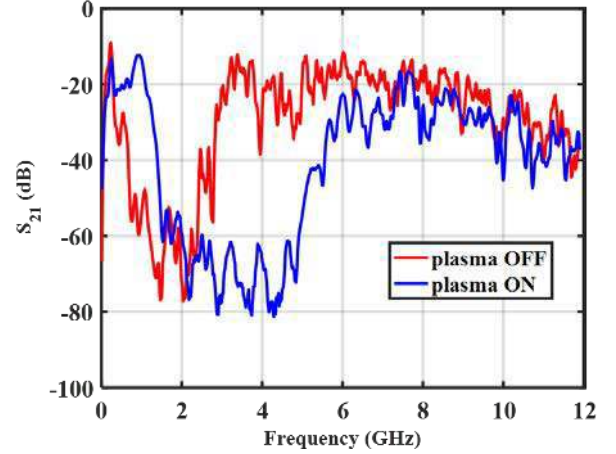Fig. 4. Measured  $S_{21}$  magnitude in plasma OFF and ON cases.

#### IV. RESULTS FOR SLOTTED WAVEGUIDE AND COAXIAL ANTENNA

Now, in order to use the metallic tube as antenna, we add 12 small slots ( $l_s = 40 \text{ mm}$ ,  $w_s = 5 \text{ mm}$ ) as presented in Figure 5 and the distance inter slot is  $\lambda/2$  at 4 GHz (40 mm) in order that antenna radiates at 4 GHz in plasma OFF case. Furthermore, 4 big slots ( $l_s = 150 \text{ mm}$ ,  $w_s = 5 \text{ mm}$ ) and distance inter slot equal to  $\lambda/2$  at 1 GHz (150 mm) are added. The antenna operate at 1 GHz in plasma ON.

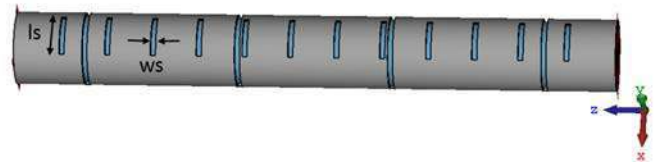Fig. 5. Geometry of the slotted waveguide, small slots ( $l_s = 40 \text{ mm}$ ,  $w_s = 5 \text{ mm}$ ) for 4 GHz antenna and big slots ( $l_s = 150 \text{ mm}$ ,  $w_s = 5 \text{ mm}$ ) for 1 GHz antenna.

The Figure 6 shows  $S_{11}$  and  $S_{21}$  of the antenna with slots in plasma OFF (Fig. 6(a)) and ON (Fig. 6(b)) cases. The matching around 4 GHz is -40 dB and the  $S_{21}$  is -10 dB, that mean, most of the energy is radiated, given good gain and good

efficiency. Turned the plasma ON, due the transformation from waveguide to coaxial line, the matching at 1 GHz becomes -20 dB and  $S_{21}$  is around -20 dB. In this case, we succeed to have a good gain and good efficiency for array with 4 elements.

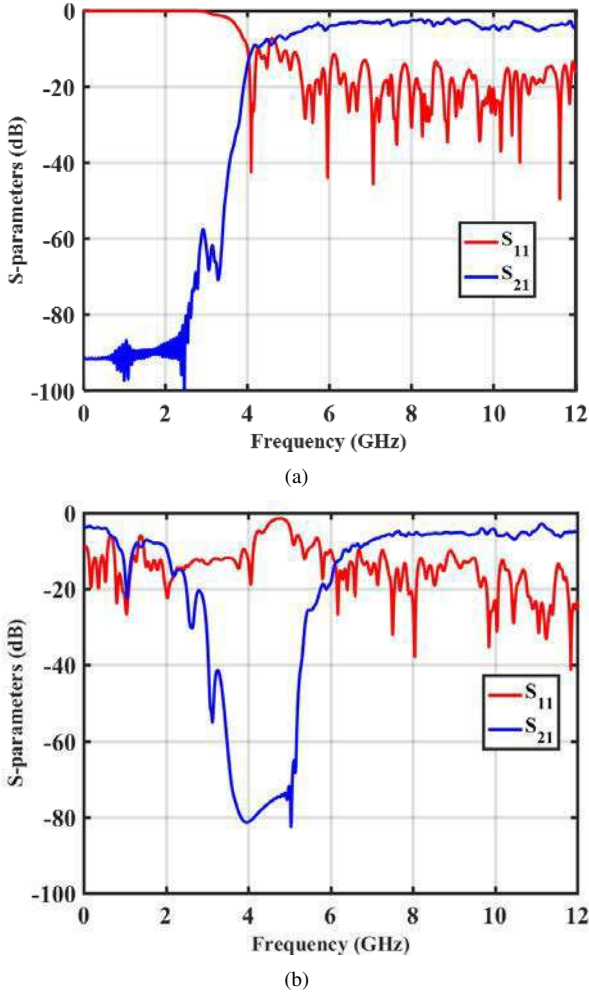


Fig. 6. Simulated  $S_{11}$  and  $S_{21}$  magnitude of the slotted antenna. (a) Plasma OFF. (b) Plasma ON.

Radiation patterns have been presented in Figure 7 in order to demonstrate the reconfigurable capability of this antenna system.

The Figures 7(a) and 7(b) shows the E-plane simulated radiation patterns respectively for the frequencies 4 GHz in plasma OFF case and 1 GHz in plasma ON case. For both simulation results, each radiation pattern is normalized to the maximum value of its electric-field.

The simulated -3 dB beamwidth is  $8.1^\circ$  at 4 GHz and  $34.1^\circ$  at 1 GHz. The antenna is tilted in both frequencies,  $120^\circ$  at 4 GHz and  $60^\circ$  at 1 GHz. The side lobe levels (SLL) are around -10 dB whatever the configurations.

The simulated maximum realized gain are shown in Figure 8. In the plasma OFF case, the gain is maximum at 4 GHz and equals to 13.27 dBi. In ON case, the gain is maximum at 1 GHz and equals to 6.82 dBi. Regarding the gain, we can

notice a difference of 40 dB at 1 GHz between plasma OFF and plasma ON and a difference of 52 dB at 4 GHz between plasma OFF and plasma ON.

Normally, the antenna should not work at 1 GHz because the cutoff frequency is higher than 1 GHz, but when the lamp is turned ON the waveguide becomes a coaxial line from where to get the radiation pattern and gain at 1 GHz.

From the gain, the efficiency of the antenna is evaluated. The total efficiency is 83.4% at 4 GHz (plasma OFF) and 68.2% at 1 GHz (plasma ON).

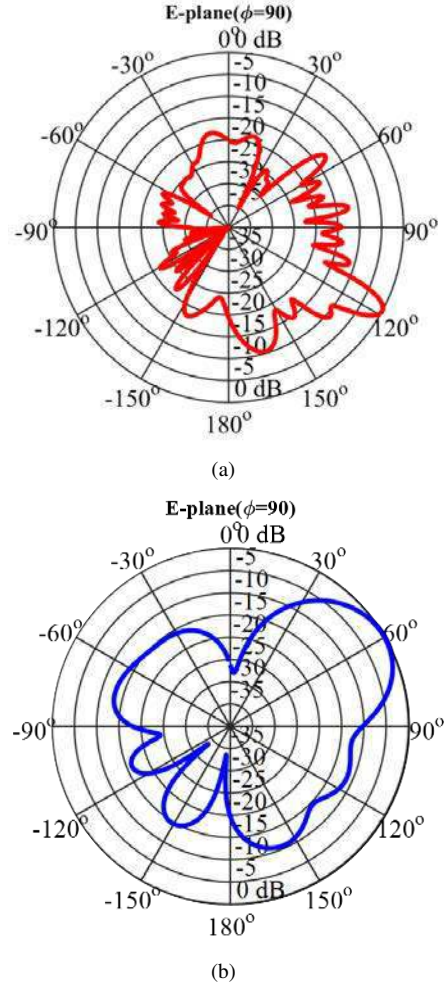


Fig. 7. Normalized H-plane radiation patterns. (a) 4 GHz in plasma OFF. (b) 1 GHz in plasma ON.

## V. CONCLUSION

In this letter, a reconfigurable slotted antenna using plasma tube inside the mettalic waveguide and allowing to obtain a reconfigurable radiation patterns according to the state of plasma was presented. The radiation patterns at 4 GHz and 1 GHz have been given showing the impact of the plasma tube. The main advantage of this antenna when the plasma is ON, is to have the possibility to radiate at 1 GHz, and

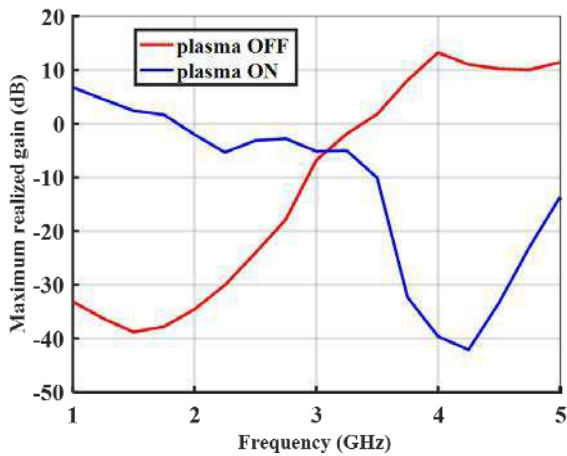


Fig. 8. Gain of the antenna in plasma OFF and ON cases.

in the same time to have a strong reduction of the gain at 4 GHz allowing a good protection against high power aggression radar or communication systems working at this frequency.

#### ACKNOWLEDGMENT

The authors would like to acknowledge Jean Christophe Lecun from IETR for their technical support.

#### REFERENCES

- [1] W. Wang, J. Jin, X.-L. Liang, et Z.-H. Zhang, "Broadband Dual polarized Waveguide Slotted Antenna Array", *IEEE Antennas and Propagation Society International Symposium*, 2006, p. 2237-2240.
- [2] S. Park, Y. Tsunemitsu, J. Hirokawa, et M. Ando, "Center feed single layer slotted waveguide array", *IEEE Transactions on Antennas and Propagation*, vol. 54, no 5, p. 1474-1480, Mai 2006.
- [3] A. Harmouch et H. s a Haddad, "Cylindrical Omnidirectional Slotted Waveguide Antenna with optimized directional characteristics", *13th Mediterranean Microwave Symposium (MMS)*, 2013, p. 1-4.
- [4] T. Li, H. Meng, et W. Dou, "Design and Implementation of Dual-Frequency Dual-Polarization Slotted Waveguide Antenna Array for Ka-Band Application", *IEEE Antennas and Wireless Propagation Letters*, vol. 13, p. 1317-1320, 2014.
- [5] P. Mondal et A. Chakrabarty, "Slotted Waveguide Antenna With Two Radiation Nulls", *IEEE Transactions on Antennas and Propagation*, vol. 56, no 9, p. 3045-3049, Sept. 2008.
- [6] X. Lu, X. Wang, W. Lu, "A low-profile parallel plate waveguide slot antenna array for dual-polarization application", *Antennas and Propagation (EUCAP), 11th European Conference*, pp. 970-972, 2017.
- [7] G.-X. Fan and J.-M. Jin, "Scattering from a cylindrically conformal slotted waveguide array antenna," *IEEE Transactions on Antennas and Propagation*, vol. 45, no. 7, pp. 1150-1159, Jul. 1997.
- [8] K. Tomar, Sanjay and Malik, Hitendra, "Density modification by two superposing TE<sub>10</sub> modes in a plasma filled rectangular waveguide", *Physics of Plasmas*.
- [9] H. Silvio and G. Jankovic, "Scanning Leaky-wave Antenna based on a Waveguide filled with Plasma-like ENG Metamaterial", *MELECON, IEEE Mediterranean Electrotechnical Conference*, 2006.
- [10] R. R. Hirani, S. K. Pathak, S. N. Shah, and D. K. Sharma, "Dispersion characteristics of dielectric tube waveguide loaded with plasma for leaky wave antenna application", *AEU - International Journal of Electronics and Communications*, vol. 83, p. 123-130, Janv. 2018.
- [11] T. Anderson et I. Alexeff, "Reconfigurable electromagnetic plasma waveguide used as a phase shifter and a horn antenna", US6812895B2, 02-nov-2004.

- [12] J. Esteban, C. Camacho-Penalosa, J. E. Page, T. M. Martin-Guerrero, et E. Marquez-Segura, "Simulation of negative permittivity and negative permeability by means of evanescent waveguide Modes-theory and experiment", *IEEE Transactions on Microwave Theory and Techniques*, vol. 53, no 4, p. 1506-1514, Avr. 2005.
- [13] M. T. Jusoh, M. Himdi, F. Colombel, and O. Lafond, "Performance and radiation patterns of a reconfigurable plasma corner-reflector antenna," *IEEE Antennas and Wireless Propagation Letters*, no 99, pp. 1137-1140, 2013.
- [14] O. A. Barro, M. Himdi, and O. Lafond, "Reconfigurable Patch Antenna Radiations Using Plasma Faraday Shield Effect," *IEEE Antennas and Wireless Propagation Letters*, vol. 15, pp. 726-729, 2016.
- [15] O. A. Barro, M. Himdi, and O. Lafond, "Reconfigurable Radiating Antenna Array Using Plasma Tubes," *IEEE Antennas and Wireless Propagation Letters*, vol. 15, pp. 1321-1324, 2016.